

08/10/99



JC682 U.S. PTO

FORM PTO-1082

 Attorney  
 Docket No.: SP98-03

1c594 U.S. PTO

09/371973



08/10/99

 THE COMMISSIONER OF PATENTS AND TRADEMARKS  
 U.S. PATENT AND TRADEMARK OFFICE  
 WASHINGTON, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of  
 Inventor: James B. Ponzo, Robert C. Schindler and Hans Harry Mueggenburg  
 for: AXIAL FLOW CATALYST PACK

Enclosed are:

- ☒ 5 informal sheets of drawing.
- ☐ An assignment of the invention to \_\_\_\_\_
- ☐ A certified copy of a \_\_\_\_\_ application.
- ☐ An associate power of attorney.
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- ☒ xx

The filing fee has been calculated as shown below:

	(Col. 1)	(Col. 2)
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	21 -20=	* 1
INDEP CLAIMS	3 -3=	* 0
<input checked="" type="checkbox"/> MULTIPLE DEPENDENT CLAIM PRESENTED		

\* If the difference in Col. 1 is less than zero, enter "0" in Col. 2

## SMALL ENTITY

RATE	FEE
	\$ .380
\$ 9	
\$ 39	
\$ 130	
TOTAL	\$

 OR  
 OR  
 OR  
 OR  
 OR  
 OR

## OTHER THAN A SMALL ENTITY

RATE	FEE
	\$ 760
\$ 18	\$ 18.000
\$ 78	\$ -0-
\$ 260	\$ -0-
TOTAL	\$ 778.00

- ☐ Please charge my Deposit Account No. 06-0930 in the amount of \$\_\_\_\_\_. A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$ 778.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 06-0930. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☐ Any patent application processing fees under 37 CFR 1.17.
- ☐ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 06-0930. A duplicate copy of this sheet is enclosed.
- ☐ Any patent application processing fees under 37 CFR 1.17.
- ☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).
- ☐ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231 on 8-10-99 (Date)

LEONARD TACHNER (NAME OF REGISTERED REP)

(Signature) (Date) 8-10-99

Respectfully submitted,

*Leonard Tachner*  
 Leonard Tachner  
 Attorney for the Applicant(s)  
 Registration No. 26,344

Dated: 8-10-99

 Telephone (949) 752-8525  
 Telefax (949) 955-2415

1 **SP98-03**

2  
3  
4 **AXIAL FLOW CATALYST PACK**

5  
6  
7 **ABSTRACT OF THE DISCLOSURE**

8  
9  
10 A stack of very thin metal plates provides high surface area for catalytic  
11 decomposition of a fluid flowing axially from upstream to downstream through the stack.  
12 Each plate has flow-through passages of selected size and location to promote uniform  
13 flow and good surface contact with a catalyst surface on the plates. The downstream  
14 surface of each plate is etched to provide gaps between plates for lateral fluid flow.  
15 The plates are divided into groups separated by metering plates that promote more  
16 uniform flow from group to group.  
17

## BACKGROUND OF THE INVENTION

### FIELD OF THE INVENTION

The present invention relates generally to apparatus for catalytic decomposition of monopropellant fuels and more specifically to a plurality of stacked thin metal plates having precise flow passages to provide selected uniform flow characteristics across each plate while promoting thorough catalytic surface contact with well mixed monopropellant.

### PRIOR ART

Catalytic decomposition of monopropellant fuels, i.e.,  $H_2O_2$  and  $N_2H_4$ , requires the use of a transitional metal catalyst to initiate and sustain decomposition. Catalyst beds are designed to supply large surface areas of catalytic substance and thorough mixing of the monopropellant to facilitate complete decomposition. A peroxide catalyst bed typically uses silver screen packs, while a  $N_2H_4$  system typically consists of iridium deposited on alumina granules. Extruded ceramic cores have also been employed.

In all instances the catalyst was applied to an aggregate material. These materials are subject to wear and are relatively fragile (the alumina granules), and do not possess a consistent flow resistance (stacked screens). The uneven flow resistance leads to localized flow restrictions which result in recirculation of the decomposed flow, unpredictable start/stop behavior and unpredictable pressure drop through the pack. The extruded ceramic cores provide straight through passages that do not promote mixing of the monopropellant, thus limiting the catalytic surface contact.

1        Examples of prior art catalyst beds are found in issued U.S. Patent Nos. 3,535,879;  
2        4,211,072; 4,517,798; 4,856,271; 4,938,932; and 5,531,968. A further example of a  
3        conventional catalyst bed is discussed below in conjunction with FIG. 4 of the  
4        accompanying drawings.  
5

## SUMMARY OF THE INVENTION

The invention provides a bonded stack of very thin metal plates, referred to as platelets, that provide very high surface area per unit of volume and precise flow passages or holes in a given cross section, resulting in high, stable and repeatable performance. Because the flow passages are precisely photo etched, the flow restriction and therefore the flow rate is uniform across each platelet. Also, by varying the diameter of the etched holes, the fraction of the cross section that is open on a given platelet can be precisely designed to give the fluid the desired pressure drop and volume to expand.

1       The platelets are segregated into distinct groups separated from one another by a  
2       metering platelet. Each metering platelet has slightly smaller flow passages than the  
3       groups preceding and following. This "restriction" will inhibit the formation of hot spots  
4       by recirculation due to non-uniform flow in an upstream group. Good fluid mixing  
5       is promoted by offsetting passages from platelet to platelet. Larger and less frequent  
6       flow passages may be used instead of smaller flow passages in the metering platelet  
7       as long as the total flow-through area is less than the platelets in the adjacent groups.  
8

## OBJECTS OF THE INVENTION

It is therefore a principal object of the present invention to provide a catalyst bed comprising a stacked plurality of contiguous thin metal plates having flow-through holes of selected size and at selected locations to promote uniform flow of a fluid through the bed.

It is another object of the present invention to provide a catalyst bed having a generally cylindrical configuration and designed to promote uniform mixing and efficient catalyst contact of a fluid flowing axially through the bed.

It is still another object of the invention to provide a catalyst bed formed from a stacked array of thin metal plates having catalyst material surfaces and axial flow-through holes and being segregated into a plurality of groups of such plates, each such group being separated from adjacent groups by a metering plate having a smaller flow area.

## BRIEF DESCRIPTION OF THE DRAWINGS

The aforementioned objects and advantages of the present invention, as well as additional objects and advantages thereof, will be more fully understood hereinafter as a result of a detailed description of a preferred embodiment when taken in conjunction with the following drawings in which:

FIG. 1 is a three-dimensional view of an axial flow catalyst pack in accordance with a preferred embodiment of the present invention;

FIG. 2, comprising FIGs. 2a, 2b and 2c, illustrates respectively an elevational view of the stack of FIG. 1, a cross-sectional view thereof and a greatly enlarged detailed view of a portion thereof;

FIG. 3 is an enlarged top view of the stack of FIG. 1 illustrating the relationship of flow passages in respective plates thereof; and

FIG. 4 is a cross-sectional view of a prior art axial flow catalyst bed.



## DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

The axial flow platelet fabricated catalyst bed 10 shown in FIG. 1 uses precise thru-etched openings 12 in each platelet 14 so that the flow can "diffuse" from the inlet platelet to each succeeding platelet. Passage cross sectional areas can be tailored by increasing the proportion of the platelet that is open and thereby the passage cross sectional and surface area can increase as the flow gasifies. This is illustrated in FIG. 2 which shows the flow path of the monopropellant through the inventive catalyst bed. The flow passes through a metering plate 1 to distribute the monopropellant uniformly across the catalyst bed and then passes through a secession of "surface enhancement" plates 2 that have a large catalytic surface area and the desired open area ratio. Then the flow passes through another metering platelet 3 and "surface enhancement" platelet group 4. Each succeeding metering platelet's fraction of open area will be greater than the previous metering platelet and less than the surface enhancement plates that precede and follow. Since the surface enhancement plates have a high surface area and fraction open area ratio, the majority of the decomposition takes place in this region. Another view of the layout is shown in FIG. 3. From this top view the relationship of the metering plate 5 to the surface enhancement plates 6 and 7 can be seen. The metering holes are larger but less frequent than the following surface enhancement holes. Alternatively, the metering holes may be of equal frequency but smaller than the enhancement holes. The first and second surface enhancement plates are identical except for the placement of the holes which are offset in respective plates to force mixing of the flow.

An equivalent axial flow catalyst bed that uses current state-of-the-art technology is shown in FIG. 4. This multiple piece assembly contains a catalyst bed consisting of an aggregate of distribution and support plates and screens made from stainless steel, nickel, silver wire, and silver plated nickel or brass wire. It contains a propellant

1 distribution plate 8, antichannel baffle 9, catalyst bed 10 and support plate 11. The  
2 axial flow catalyst bed that decomposes propellants such as hydrogen peroxide ( $H_2O_2$ )  
3 and hydrazine ( $N_2H_4$ ) is unable to compensate for the increase in the volume of the  
4 effluent as it converts from liquid to superheated gas. This has been countered by  
5 arranging the flow path for a radial direction that takes advantage of the bed size  
6 increase as the flow proceeds from a central core to a peripheral outlet. However, it  
7 results in an assembly that is both complex and costly.

8  
9 Due to the high percentage of open area in the axial flow platelet catalyst bed, the  
10 flow restriction will be small. Since decomposition will most likely not happen in a  
11 totally uniform manner, the pack could become prone to the same problems as a  
12 screen pack, namely, re-circulation of the decomposed products and the resulting hot  
13 spots. The intermittent metering plates keep this phenomenon from developing. These  
14 plates have a lower fraction open area than the surface enhancement plates that  
15 precede and follow. This results in a restriction that will isolate each group of surface  
16 enhancement plates from the others. Any hot spot/re-circulation zone will be unable to  
17 propagate throughout the stack. The metering platelets will also act as flow distributors  
18 to keep the flow uniform across the bed which will avoid the initiation of the re-  
19 circulation zones.

20  
21 All platelets are depth etched on the downstream side to allow lateral flow to occur  
22 between platelets. Thru-etched axial holes are uniformly spaced across the entire  
23 platelet but are offset in alternate platelets to preclude pure axial flow. By offsetting the  
24 holes, the fluid is forced to impinge on the catalyst of each platelet before traversing  
25 360 degrees sideways to exit through the next platelet holes where the process  
26 repeats. This continuous turning of the fluid promotes turbulence in the  
27 monopropellant and assures that the monopropellant makes continuous contact with  
28 the catalyst.

1 The depth etched portion of each platelet incorporates islands 17 that are not etched.  
2 These islands are located in each platelet at identical locations so that when the  
3 platelets are assembled they form solid vertical columns 19 throughout the stack to  
4 provide structural integrity to the catalyst bed.  
5

6 The platelets can be, but are not limited to pure catalytic material (i.e., silver or  
7 platinum). They can be bonded or unbonded, or may be a catalytic material plated on  
8 a stronger material (i.e., silver plated onto nickel). The materials may also vary  
9 throughout the stack. High concentrations of peroxide for example decompose at a  
10 temperature higher than silver's melting temperature. Silver platelets, or silver coated  
11 platelets may be used only for the first portion of the bed, where the decomposition is  
12 initiated. However, as the temperature increases above silver's melting temperature  
13 the remainder of the plates would be made of a high temperature material such as  
14 nickel. This will allow sustained operation at elevated temperatures without  
15 degradation of the pack.  
16

17 The platelet stack catalyst bed which is the preferred embodiment of this invention,  
18 can operate as a monolithic platelet stack or as an unbonded stack. The latter has a  
19 distinct advantage during development testing whereas the former could serve as a  
20 very lightweight integrated assembly. For development testing individual platelets  
21 would be stacked in a housing. Because there is little compliance compared to a  
22 screen catalyst bed, high compressive forces would not be required, i.e, the platelets  
23 only have to bottom out on each other.  
24

25 Having thus disclosed a preferred embodiment of the invention, it being understood  
26 that the embodiment is merely exemplary of the underlying concepts of the invention  
27 and that other embodiments which utilize such concepts in a different form are also  
28 contemplated, what we claim is:  
29

## CLAIMS

1. A catalyst bed for decomposition of monopropellant fuel using a transitional metal catalyst over which the fuel is made to flow; the bed comprising:

5 a plurality of thin metal plates in a stacked contiguous relation, each such plate having a surface of catalytic material and a plurality of flow-through holes of selected size and location for flow of said fuel axially through said stacked plates, at least a portion of each such plate on a downstream side being etched to permit lateral flow of said fuel between said plates.

2. The catalyst bed recited in claim 1 wherein said plurality of plates comprises a plurality of groups of said plates, each said group being separated from adjacent said groups by a metering plate having flow-through holes that provide reduced open area compared to the flow-through holes of said adjacent groups of said plates.

3. The catalyst bed recited in claim 2 wherein each said metering plate which is positioned more downstream of an upstream metering plate comprises larger flow-through holes than said upstream metering plate.

4. The catalyst bed recited in claim 1 wherein said flow-through holes of adjacent plates are axially offset from plate to plate to promote lateral flow of said fuel between said plates.

5. The catalyst bed recited in claim 1 wherein said etched downstream side of each said plate comprises unetched portions forming support columns for supporting each said plate on an adjacent said plate.

6. The catalyst bed recited in claim 1 wherein said metal plates are substantially circular.

7. The catalyst bed recited in claim 1 wherein said metal plates are bonded to one another to form a monolithic stack.

8. A catalyst converter for promoting the decomposition of a liquid fuel into a gas;  
the converter comprising:

5 a plurality of thin metal plates having a surface formed of a catalyst material and  
stacked axially along a flow path of said fuel from upstream to downstream; each said  
plate having a plurality of flow-through holes leading from its upstream surface to its  
downstream surface, the downstream surface of each said plate being at least partially  
removed to promote lateral flow of said fuel between each pair of adjacent plates.

9. The catalyst converter recited in claim 1 wherein said plurality of plates  
comprises a plurality of groups of said plates, each said group being separated from  
adjacent said groups by a metering plate having flow-through holes that provide  
reduced open area as compared to the flow-through holes of said adjacent groups of  
said plates.

10. The catalyst converter recited in claim 9 wherein each said metering plate which  
is positioned more downstream of an upstream metering plate, comprises larger  
flow-through holes than said upstream metering plate.

11. The catalyst converter recited in claim 8 wherein said flow-through holes of adjacent plates are axially offset from plate to plate to promote lateral flow of said fuel between said plates.

12. The catalyst converter recited in claim 8 wherein said etched downstream side of each said plate comprises unetched portions forming support columns for supporting each said plate on an adjacent said plate.

13. The catalyst converter recited in claim 8 wherein said metal plates are substantially circular.

14. The catalyst converter recited in claim 8 wherein said metal plates are bonded to one another to form a monolithic stack.

15. A catalyst bed comprising:

a generally cylindrical array of catalyst material the axis of which is substantially parallel to the direction of flow of a fluid through said bed, the catalyst material being configured as the surface material of a plurality of stacked, contiguous, thin metal plates having axial flow-through holes of selected size and location to promote uniform flow and contact of said fluid with said catalyst material.

16. The catalyst bed recited in claim 15 wherein at least a portion of each said thin metal plate is removed to provide a gap between adjacent plates to promote lateral flow of said fluid.

17. The catalyst bed recited in claim 15 wherein said plates are segregated into a plurality of groups of said plates and wherein each said group is separated from an adjacent group by a metering plate having flow-through holes the total area of which is less than the total area of the flow-through holes in said plates of said groups.




18. The catalyst bed recited in claim 17 wherein each said metering plate which is positioned more downstream of an upstream metering plate comprises larger flow-through holes than said upstream metering plate.

19. The catalyst bed recited in claim 15 wherein said flow-through holes of adjacent plates are axially offset from plate to plate to promote lateral flow of said fuel between said plates.


20. The catalyst bed recited in claim 1 wherein said removed portion of each said plate comprises unremoved portions forming support columns for supporting each said plate on an adjacent said plate.

21. The catalyst bed recited in claim 15 wherein each said plate is characterized by an open area ratio which is defined as the combined area of the flow-through holes divided by the total area of the plate and wherein the open area ratio of said plates generally increases along said direction of flow.

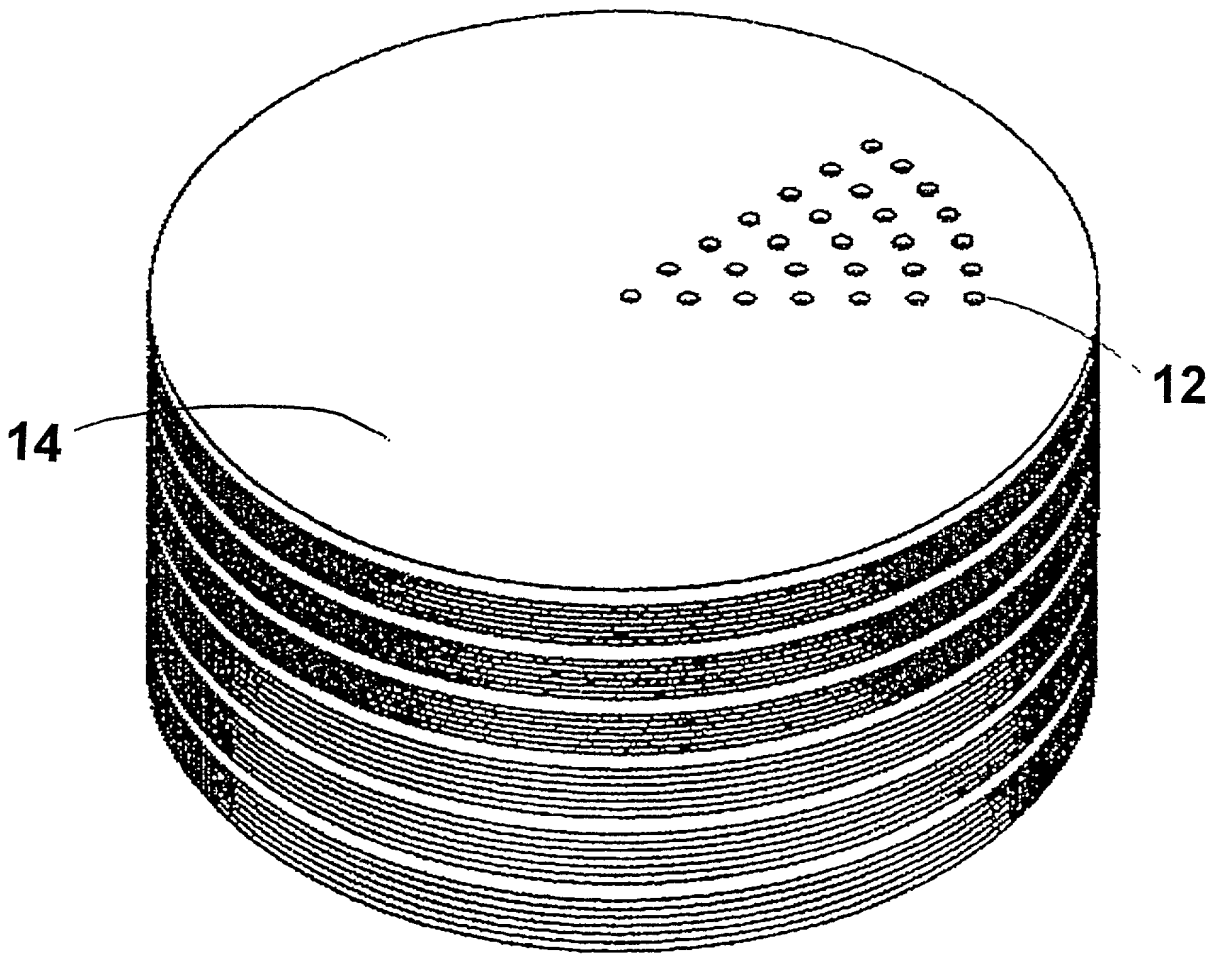


**FIG. 1**


10

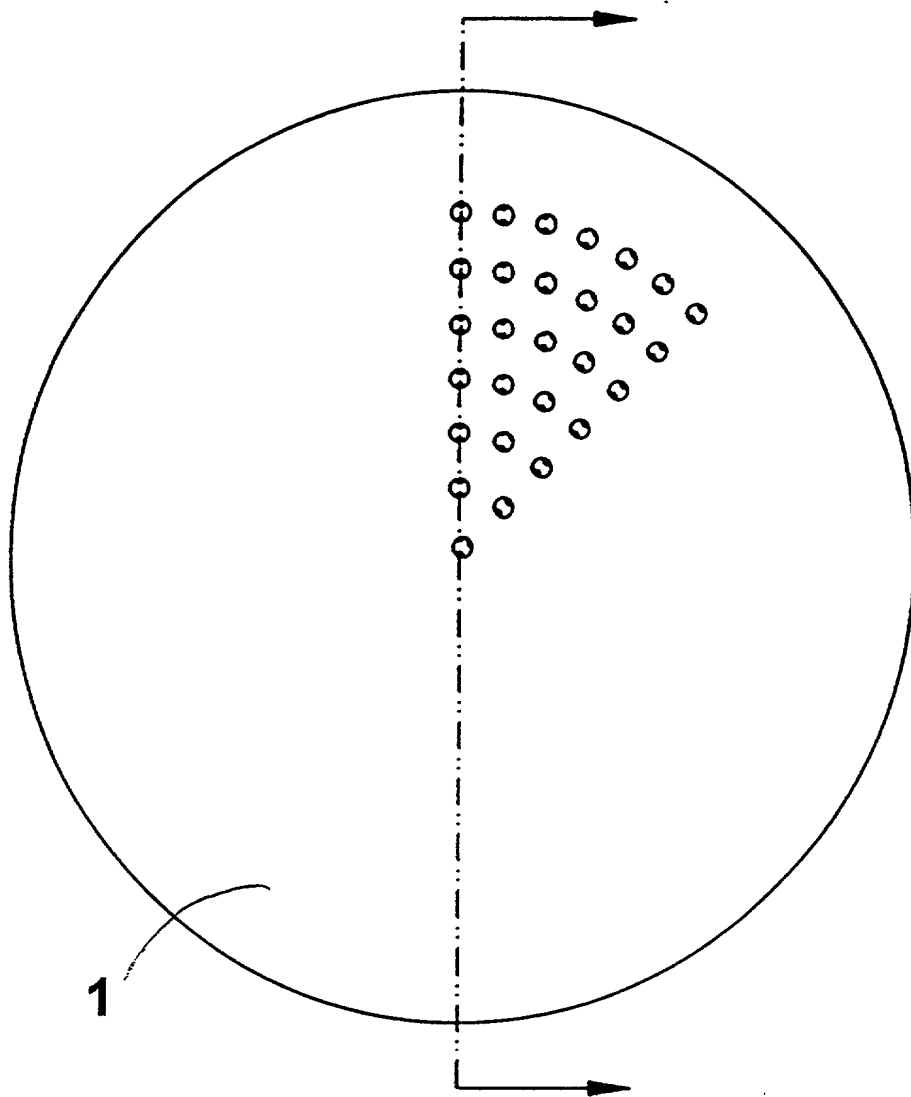

**FIG. 2a**

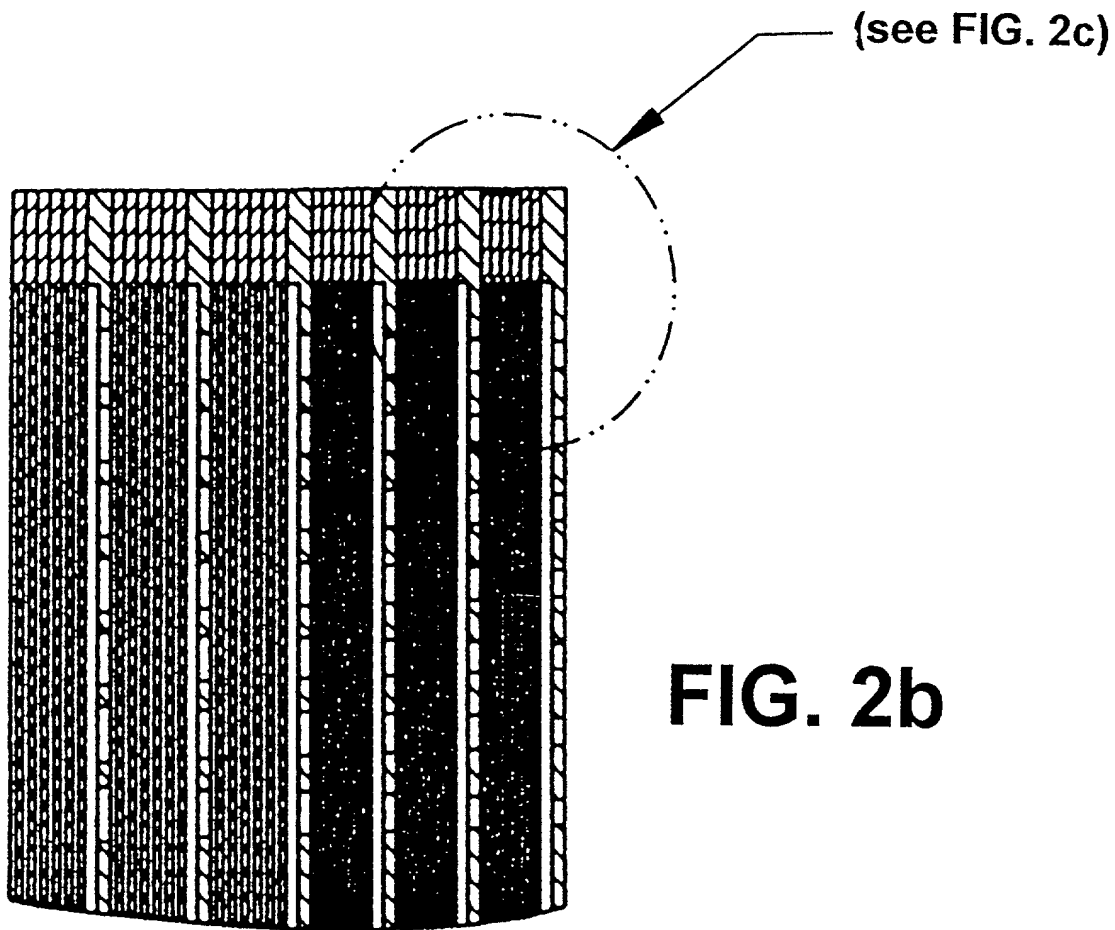


**FIG. 2b**

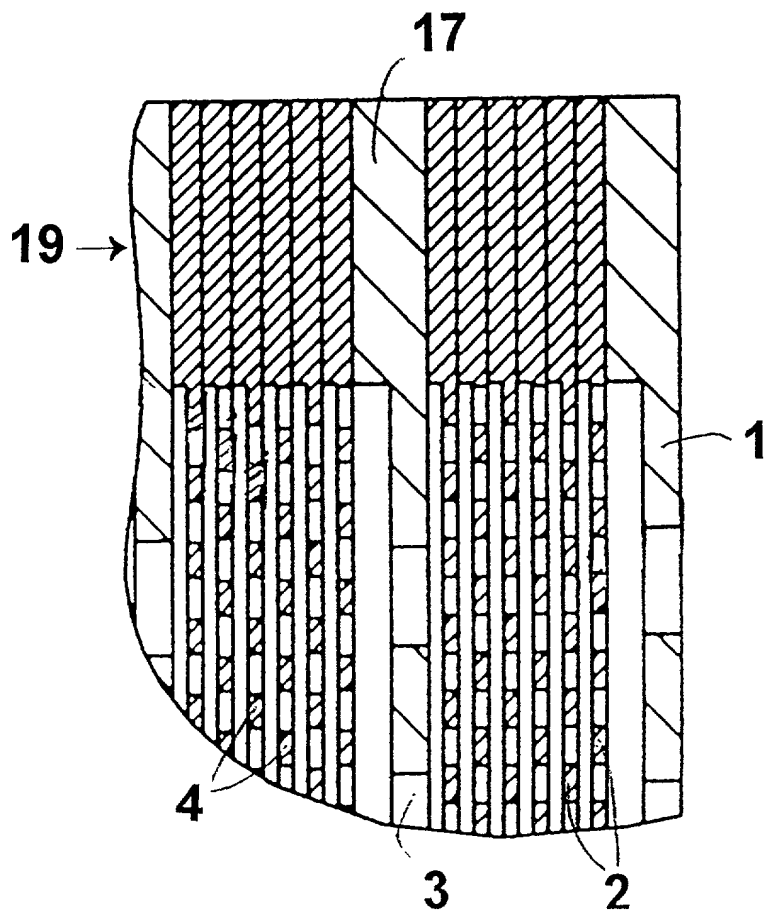

**FIG. 2c**



Flow

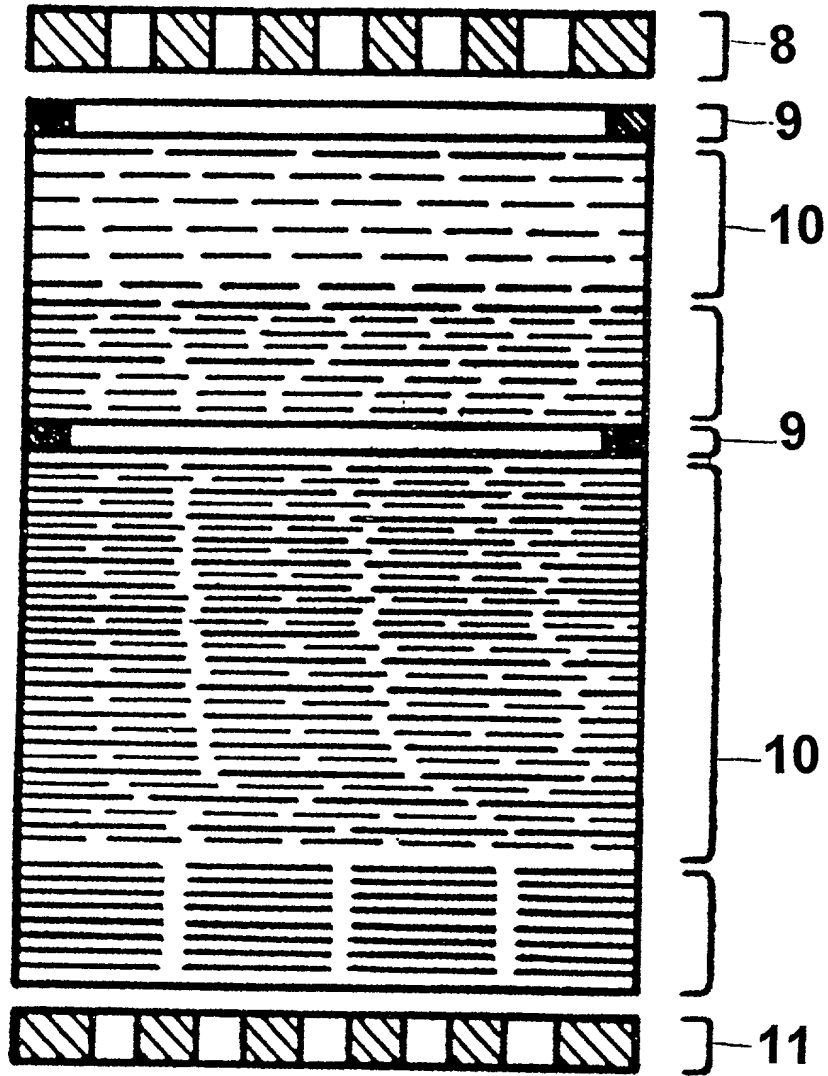

**FIG. 4**  
(PRIOR ART)

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

AXIAL FLOW CATALYST PACK

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_

and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed: NONE

# English Language Declaration

## Prior Foreign Application(s)

## Priority Claimed

(Number)

(Country)

(Day/Month/Year Filed)

☐  
Yes

☐  
No

(Number)

(Country)

(Day/Month/Year Filed)

☐  
Yes

☐  
No

(Number)

(Country)

(Day/Month/Year Filed)

☐  
Yes

☐  
No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.



## English Language Declaration

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Leonard Tachner, Registration No. 26,344

### Send Correspondence to:

Leonard Tachner, 3990 Westerly Place, Suite 295, Newport Beach,  
California 92660

### Direct Telephone Calls to: (name and telephone number)

Leonard Tachner (714) 752-8525

Full name of sole or first inventor	
James B. Ponzo	
Inventor's signature	Date
X <i>James B. Ponzo</i>	7-7-99
Residence	
Rocklin, California 95677	
Citizenship	
United States of America	
Post Office Address	
5225 Whitney Boulevard, Rocklin, California 95677	
Full name of second joint inventor, if any	
Robert C. Schindler	
Second Inventor's signature	Date
X <i>Robert C. Schindler</i>	7-7-99
Residence	
Rancho Murrieta, California 95683	
Citizenship	
United States of America	
Post Office Address	
6521 Via Sereno, Rancho Murrieta, California 95683	

(Supply similar information and signature for third and subsequent joint inventors.)

# English Language Declaration

Full name of third joint inventor, if any	
Hans Harry Muegggenburg	
Third inventor's signature	Date
X <i>Hans Harry Muegggenburg</i>	6/16/99
Residence	
Carmichael, California 95608	
Citizenship	
United States of America	
Post Office Address	
3525 Bluff Court, Carmichael, California 95608	
Full name of fourth joint inventor, if any	
Fourth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	
Full name of Fifth joint inventor, if any	
Fifth Inventor's signature	Date
Residence	
Citizenship	
Post Office Address	
Full name of Sixth joint inventor, if any	
Sixth Inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

(Supply similar information and signature for subsequent joint inventors.)